ELEVATIONS IN METRES

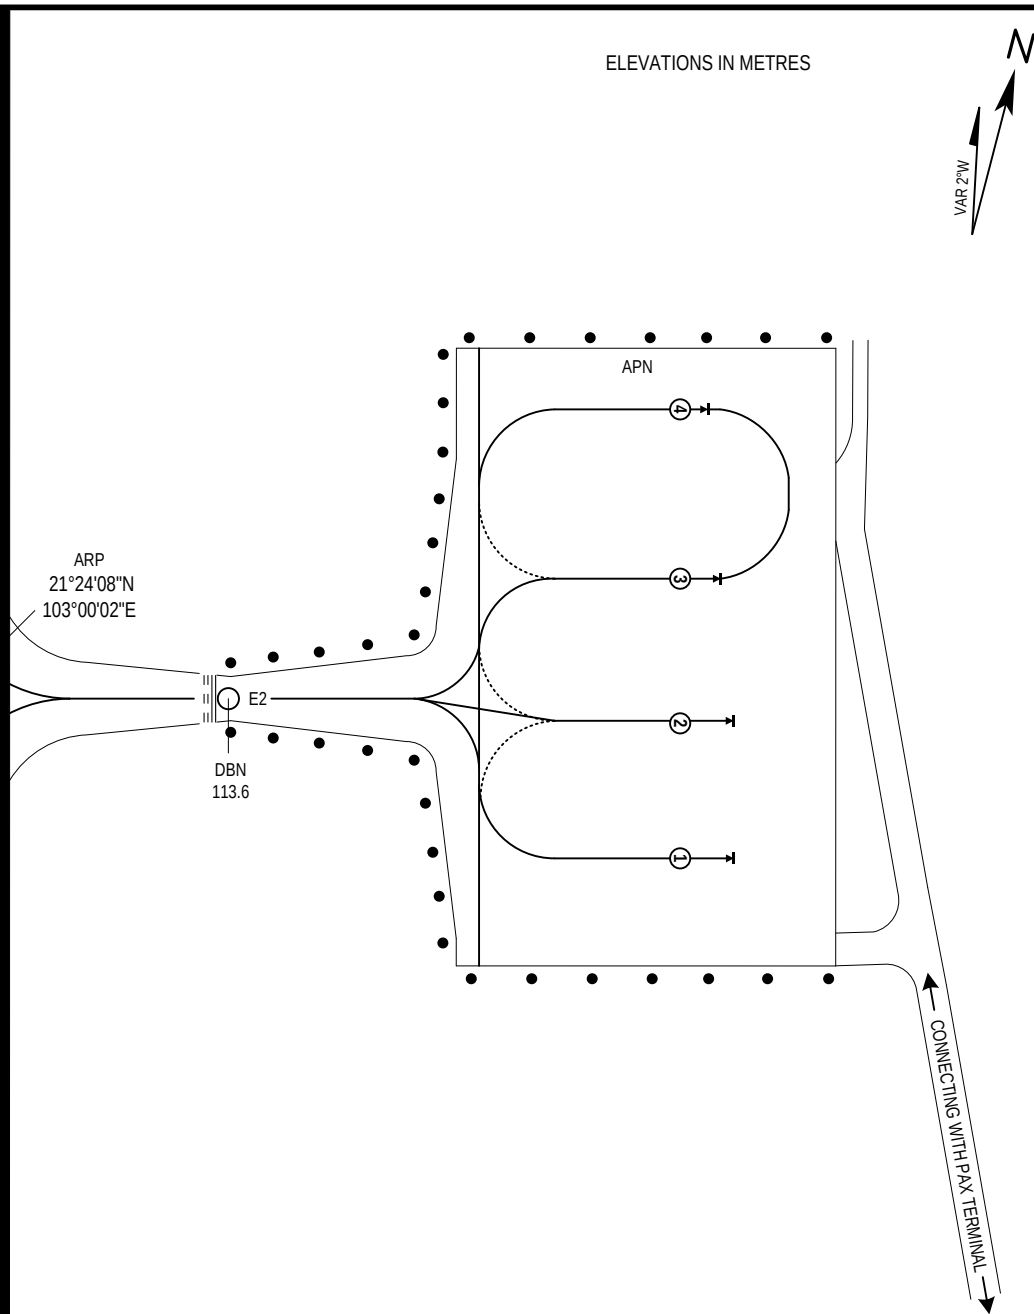

RWY 17/35 2400 X 45 CEMENT CONCRETE

TWY WIDTH E2: 15M
TWY BEARING STRENGTH PCN 92/R/A/W/T, CEMENT CONCRETE
APN BEARING STRENGTH PCN 77/R/A/W/T, CEMENT CONCRETE

- ACFT STANDS 1, 2 AND 3: USED FOR ACFT UP TO CODE C AND EQUIVALENT (WINGSPAN UP TO BUT NOT INCLUDING 36 M).
- ACFT STAND 4: USED FOR ACFT UP TO ATR72 AND EQUIVALENT (WINGSPAN UP TO INCLUDING 30 M).
*** OPERATIONAL LIMITATIONS: ACFT PARKED AT STAND 4 ARE NOT ALLOWED TO SELF-TAXI OUT WHEN THERE IS ACFT PARKING AT STAND 3.**

LEGENDS	
VOR CHECK-POINT	DBN 113.6
RWY HLDG PSN PATTERN - A	
ACFT STANDS	1

INS COORDINATES FOR AIRCRAFT STANDS		
1	21°24'08.19"N	103°00'10.89"E
2	21°24'09.61"N	103°00'10.52"E
3	21°24'11.03"N	103°00'10.16"E
4	21°24'12.73"N	103°00'09.32"E

50 0 50 100 METRES
100 0 200 400 FEET

CHANGES: PCN OF TWY E2, APN; ADDITIONAL OF OPERATION PROCEDURE FOR STANDS.