
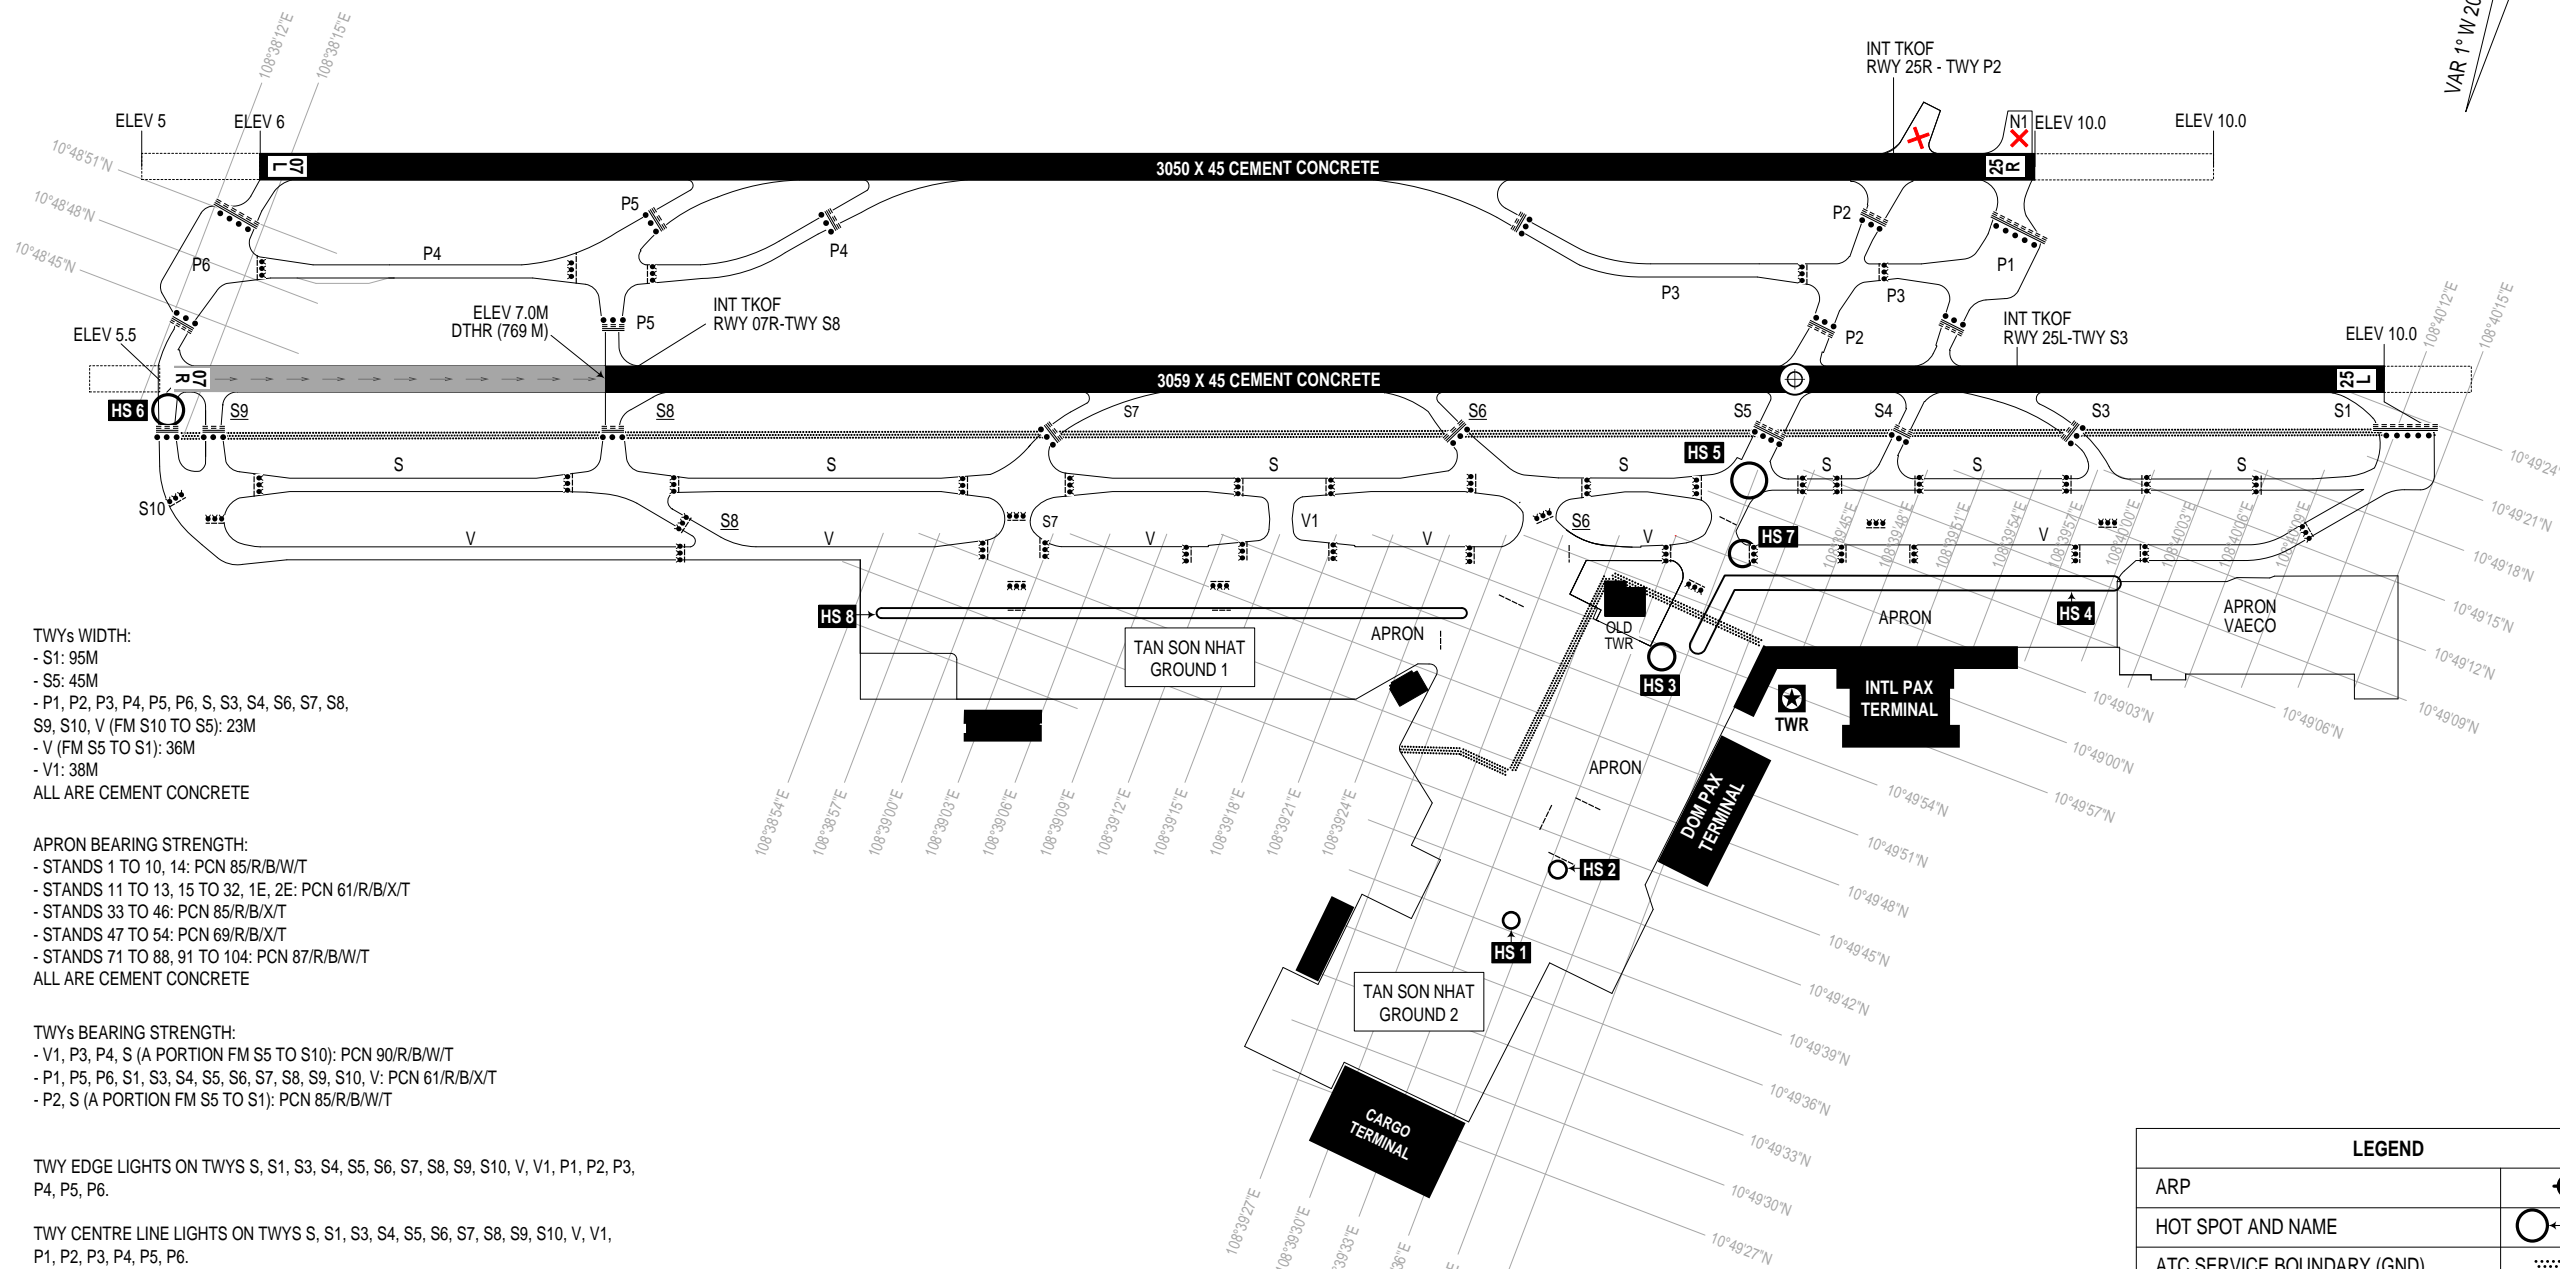


ELEVATIONS IN METRES  
BEARINGS ARE MAGNETIC



TWYs WIDTH:  
 - S1: 95M  
 - S5: 45M  
 - P1, P2, P3, P4, P5, P6, S, S3, S4, S6, S7, S8, S9, S10, V (FM S10 TO S5): 23M  
 - V (FM S5 TO S1): 36M  
 - V1: 38M  
 ALL ARE CEMENT CONCRETE


APRON BEARING STRENGTH:  
 - STANDS 1 TO 10, 14: PCN 85/R/B/W/T  
 - STANDS 11 TO 13, 15 TO 32, 1E, 2E: PCN 61/R/B/X/T  
 - STANDS 33 TO 46: PCN 85/R/B/X/T  
 - STANDS 47 TO 54: PCN 69/R/B/X/T  
 - STANDS 71 TO 88, 91 TO 104: PCN 87/R/B/W/T  
 ALL ARE CEMENT CONCRETE

TWYs BEARING STRENGTH:  
 - V1, P3, P4, S (A PORTION FM S5 TO S10): PCN 90/R/B/W/T  
 - P1, P5, P6, S1, S3, S4, S5, S6, S7, S8, S9, S10, V: PCN 61/R/B/X/T  
 - P2, S (A PORTION FM S5 TO S1): PCN 85/R/B/W/T

TWY EDGE LIGHTS ON TWYS S, S1, S3, S4, S5, S6, S7, S8, S9, S10, V, V1, P1, P2, P3, P4, P5, P6.

TWY CENTRE LINE LIGHTS ON TWYS S, S1, S3, S4, S5, S6, S7, S8, S9, S10, V, V1, P1, P2, P3, P4, P5, P6.

COMMUNICATION FACILITIES	
TAN SON NHAT GROUND 1:	121.9 MHz PRI
	121.975 MHz SRY
	121.5 MHz EMERG
TAN SON NHAT GROUND 2:	121.6 MHz PRI
	121.75 MHz SRY
	121.5 MHz EMERG



LEGEND	
ARP	
HOT SPOT AND NAME	HS 1
ATC SERVICE BOUNDARY (GND)	
INTERMEDIATE HOLDING POSITION	
SERVICE ROAD	ROAD
RWY-HOLDING POSITION (PATTERN A)	
STOP BAR	
CLOSED	
BUILDINGS	
INTERMEDIATE HOLDING POSITION LIGHT (UNIDIRECTIONAL, YELLOW)	

CHANGE: CORRECT TRANSLATION "A PORTION FM S5 TO S1".