



RWY	DIRECTION (TRUE)	THR WGS-84	BEARING STRENGTH
07L	069°	10°48'54"N 106°38'14"E	PCN 90/R/B/W/T
25R	249°	10°49'29"N 106°39'47"E	
07R	069°	10°48'41"N 106°38'13"E	PCN 63/R/B/X/T
07R (DISPLACED)	069°	10°48'50"N 106°38'36"E	
25L	249°	10°49'25"N 106°40'10"E	

ELEVATIONS AND DIMENSIONS IN METRES
BEARING ARE MAGNETIC



COMMUNICATION FACILITIES

TAN SON NHAT GROUND 1:	121.9 MHz PRI
	121.975 MHz SRY
	121.5 MHz EMERG
TAN SON NHAT GROUND 2:	121.6 MHz PRI
	121.75 MHz SRY
	121.5 MHz EMERG

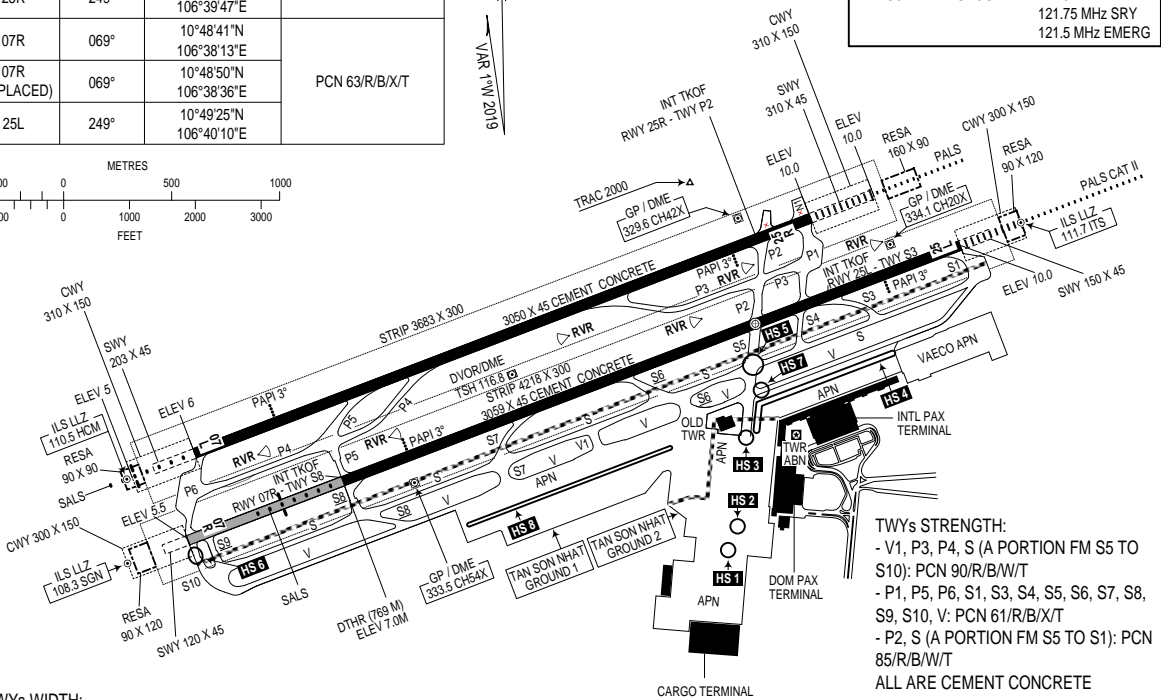

TWYs WIDTH:

- S1: 95M
- S5: 45M
- P1, P2, P3, P4, P5, P6, S, S3, S4, S6, S7, S8, S9, S10, V (FM S10 TO S5): 23M
- V (FM S5 TO S1): 36M
- V1: 38

APRON BEARING STRENGTH:

- STANDS 1 TO 10, 14: PCN 85/R/B/W/T
- STANDS 11 TO 13, 15 TO 32, 1E, 2E: PCN 61/R/B/X/T
- STANDS 33 TO 46: PCN 85/R/B/X/T
- STANDS 47 TO 54: PCN 69/R/B/X/T
- STANDS 71 TO 88, 91 TO 104: PCN 87/R/B/W/T
- ALL ARE CEMENT CONCRETE

TWYs STRENGTH:


- V1, P3, P4, S (A PORTION FM S5 TO S10): PCN 90/R/B/W/T
- P1, P5, P6, S1, S3, S4, S5, S6, S7, S8, S9, S10, V: PCN 61/R/B/X/T
- P2, S (A PORTION FM S5 TO S1): PCN 85/R/B/W/T
- ALL ARE CEMENT CONCRETE

TWY EDGE LIGHTS ON TWYS S, S1, S3, S4, S5, S6, S7, S8, S9, S10, V, V1, P1, P2, P3, P4, P5, P6
TWY CENTRE LINE LIGHTS ON TWYS S, S1, S3, S4, S5, S6, S7, S8, S9, S10, V, V1, P1, P2, P3, P4, P5, P6

LIGHTING AIDS THR RWY 07L/25R




LIGHTING AIDS THR RWY 07R/25L




LEGEND

HOT SPOT AND NAME	○ ← HS 1
CLOSED	×
BUILDING	■
ATC SERVICE BOUNDARY (GND)	▨
RWY-HOLDING POSITION (PATTERN A)	≡≡≡
STOP BAR	●●●
ARP	⊕


MARKING AIDS RWY 07L/25R AND EXIT TWY

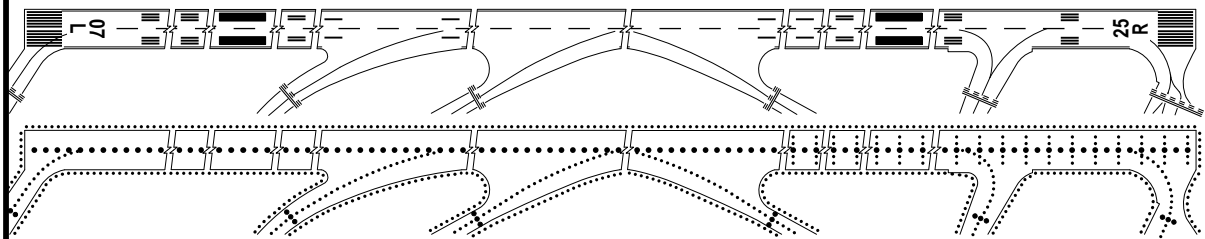

LIGHTING AIDS RWY 07L/25R AND EXIT TWY



MARKING AIDS RWY 07R/25L AND EXIT TWY

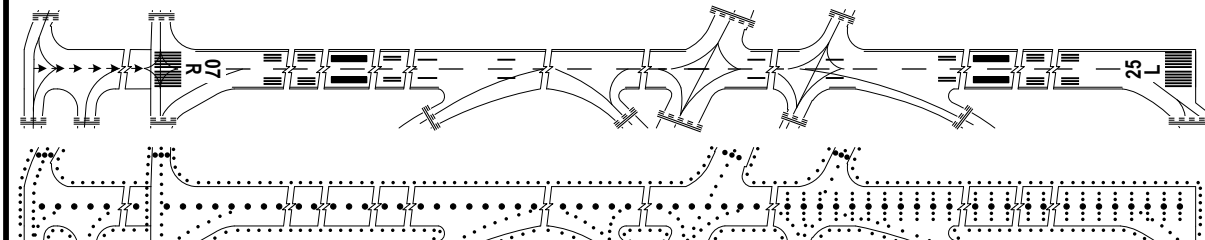

LIGHTING AIDS RWY 07R/25L AND EXIT TWY