


TWR:	118.2	PRI	124.35	SRY
GROUND :	121.825	PRI	121.625	SRY
			121.5	EMERG

ELEVATIONS IN METRES.

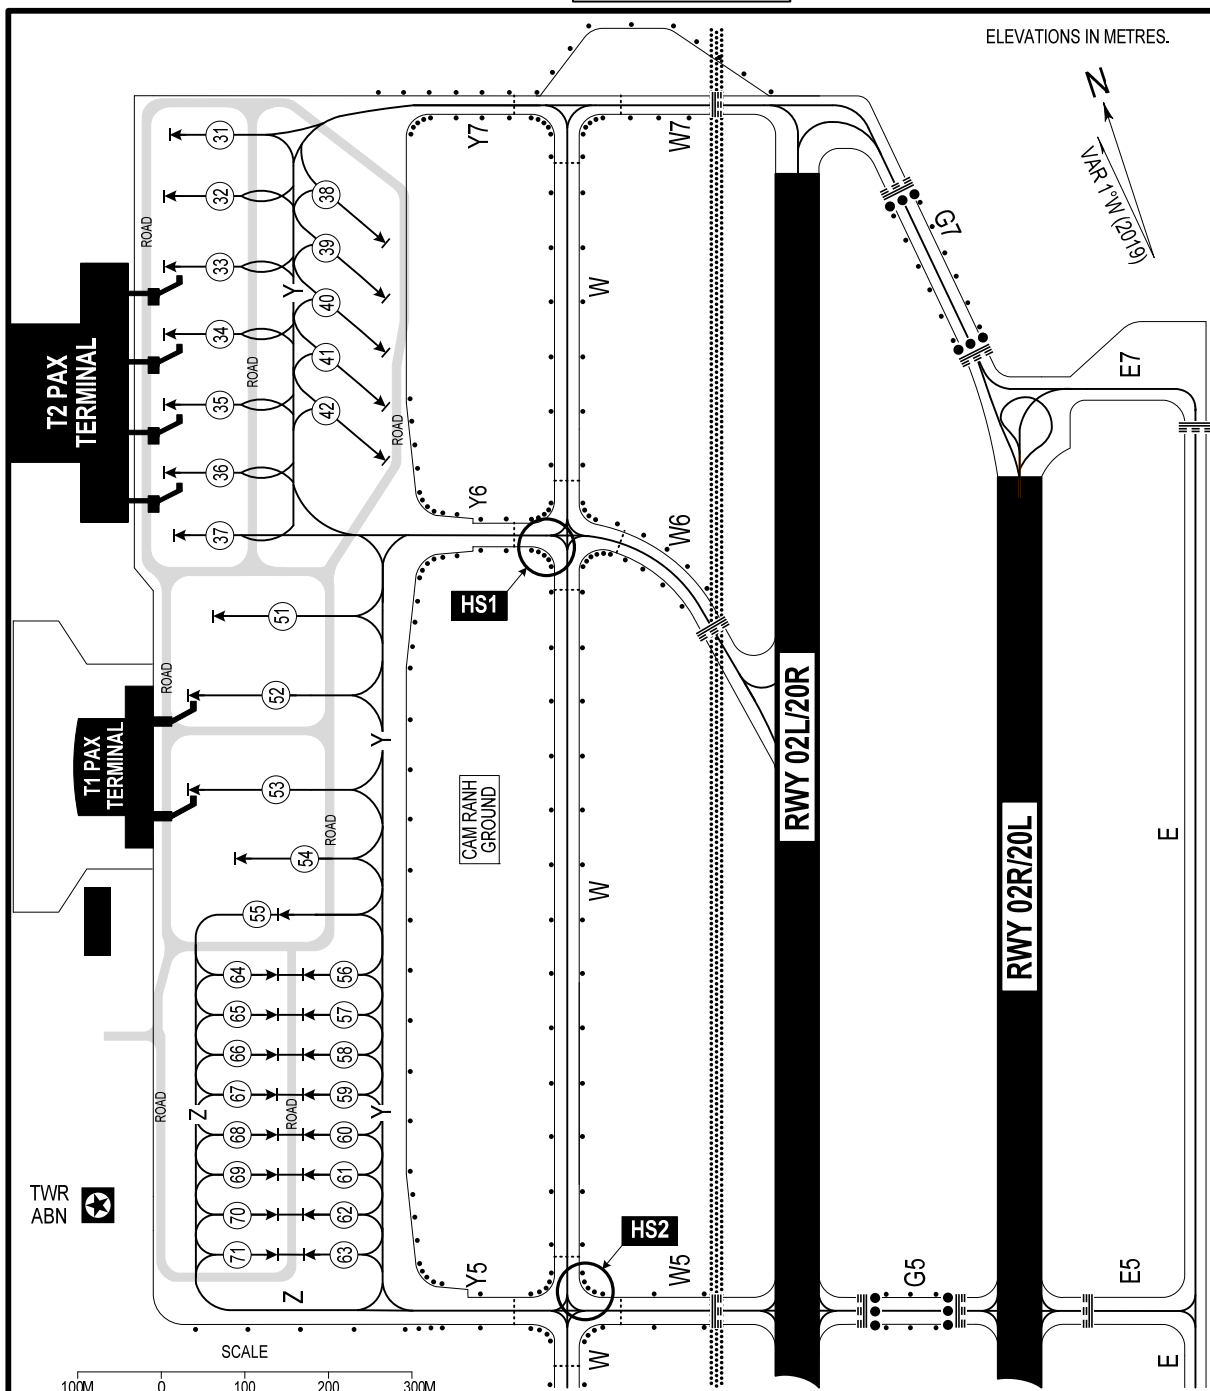

NOTES:  
 - TWYS E, E5, E7 ARE ONLY USED FOR MILITARY AIRCRAFT.  
 - INS COORDINATES FOR ACFT STANDS REFER TO TEXTUAL FOR DETAILS.

TWYS WIDTH:  
 - W, W5, W6, W7, Y5, Y6, Y7, G5, G7: 23M  
 TWY BEARING STRENGTH:  
 - TWYS W, W5, W6, Y6, G5: PCN 42/R/B/X/T  
 - TWY Y5: PCN 47/R/B/X/T  
 - TWYS G7, Y7, W7: PCN 66/R/A/W/T  
 APRON BEARING STRENGTH:  
 - INCLUDING STANDS 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 51, 52, 53, 54, 55: PCN 66/R/A/W/T  
 - INCLUDING STANDS 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71: PCN 71/R/A/W/T

LEGEND	
BUILDINGS	
HOT SPOT AND NAME	
ACFT STAND	
RWY-HOLDING POSITION (PATTERN A)	
STOP BAR	
INTERMEDIATE HOLDING POSITION	
TWY EDGE LIGHT	
SERVICE ROAD	
ATC SERVICE BOUNDARY	

NOTES:  
 - ACFT STANDS 31, 37 USED FOR AIRCRAFT UP TO CODE D (WINGSPAN UP TO BUT NOT INCLUDING 52 M) AND EQUIVALENT.  
 - ACFT STANDS 32, 33, 34, 35, 36, 51, 52, 53, 54 USED FOR AIRCRAFT UP TO CODE E (WINGSPAN UP TO BUT NOT INCLUDING 65 M) AND EQUIVALENT.  
 - ACFT STANDS 38, 39, 40, FM 55 TO 71 USED FOR AIRCRAFT UP TO CODE C (WINGSPAN UP TO BUT NOT INCLUDING 36 M) AND EQUIVALENT.  
 - ACFT STANDS 41, 42 USED FOR AIRCRAFT UP TO A320 AND EQUIVALENT.

CHANGE: ADDN OF ATC SERVICE BOUNDARY BETWEEN GND AND TWR.