


STANDARD ARRIVAL CHART - INSTRUMENT (STAR) - ICAO (OVERLAY TO RADAR VECTOR PATTERN)

TRANSITION ALTITUDE
2750 m

TMC: 125.1 PRI
126.575 SRY
ARR: 121.0 PRI
120.075 SRY
TWR: 118.4 PRI
118.9 SRY



HA NOI/NOI BAI INTL (VNVB)
RNAV RWY 29L/R
TAMDA 1G/1M, HAKAO 1H/1S,
BISON 1E/1S, MUCHI 1G/1K, HUVAN 1K/1S

105°00'E



ELEV, ALT, HGT IN METRES
DIST IN KILOMETRES
BRG ARE MAG
VAR 2° W

REQUIRED:
1. RNAV 1 GNSS.
2. ATS SURVEILLANCE.

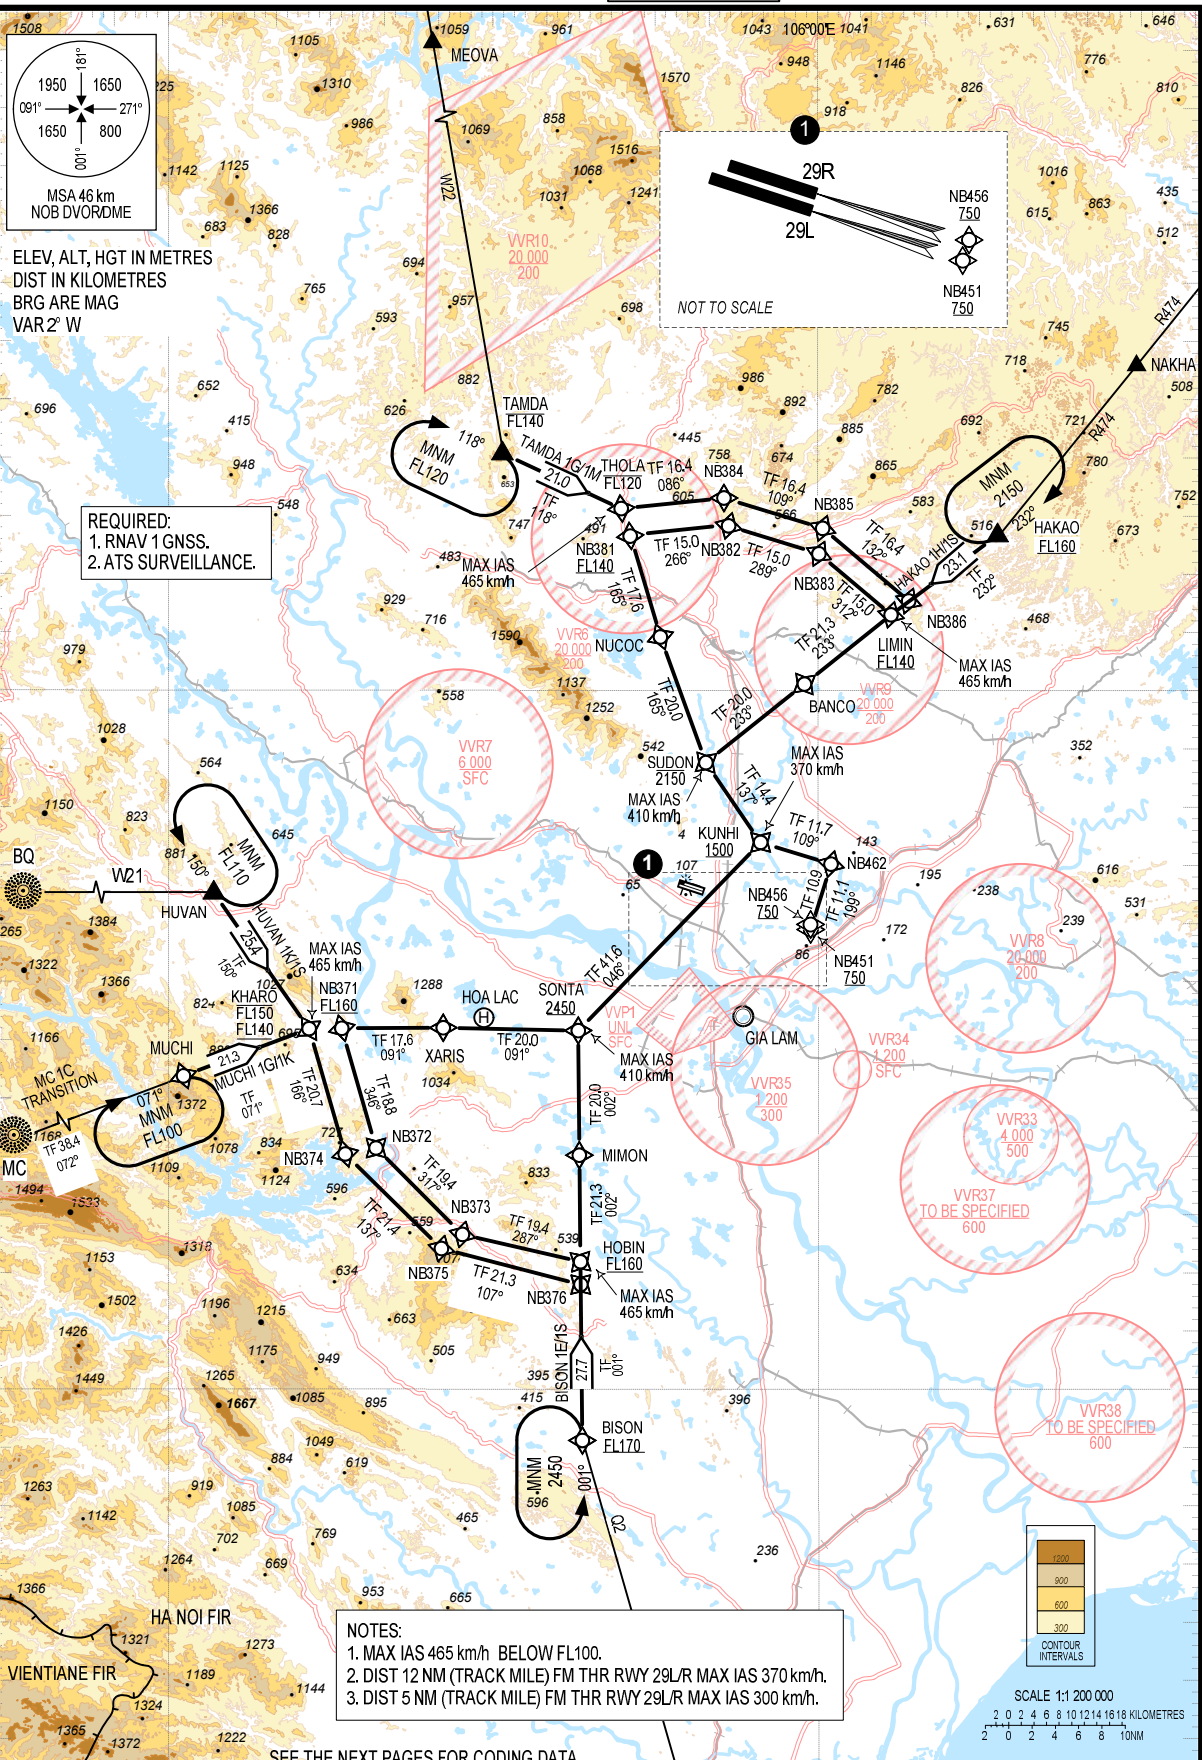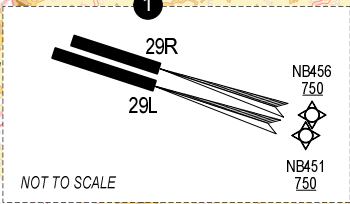

NOTES:
1. MAX IAS 465 km/h BELOW FL100.
2. DIST 12 NM (TRACK MILE) FM THR RWY 29L/R MAX IAS 370 km/h.
3. DIST 5 NM (TRACK MILE) FM THR RWY 29L/R MAX IAS 300 km/h.

SEE THE NEXT PAGES FOR CODING DATA.

SCALE 1:1 200 000
2 0 2 4 6 8 10 12 14 16 18 KILOMETRES
2 0 2 4 6 8 10 NM