


RWY	DIRECTION (TRUE)	THR WGS-84	BEARING STRENGTH
11L	107°	21°13'31"N 105°47'33"E	PCN 98/R/B/W/T
29R	287°	21°13'00"N 105°49'19"E	
11R	107°	21°13'29"N 105°47'11"E	PCN 99/R/B/W/T
29L	287°	21°12'53"N 105°49'17"E	




- TWYs WIDTH:
- N, N1, N2, N4, N5: 18M.
 - N3: 14M
 - P3, P4, P5, P6, P7, P8, P9, S, S1, S3, S5, S8, S9, S10, V, V1, V2, V5: 23M.
 - S6, S7, V6: 27M.
 - S4: 28M.
 - V3, V4, V7: 38M.
 - V8, V9: 30M.

- TWYs BEARING STRENGTH:
- N, N1, N2, N3, N4, N5, S8, V5, S3: PCN 54/R/C/W/U.
 - S, S7, V1, V2, V3, V4, V7: PCN 65/R/B/W/T.
 - P4, P7, P9, S9, S10: PCN 95/R/B/W/T.
 - V8, V9: PCN 85/R/B/W/T.
 - P5, P6, P8: PCN 96/R/B/W/T.
 - **S6, V6: PCN 60/R/C/W/U.**
 - P3, S1: PCN 98/R/B/W/T.
 - S4, S5: PCN 97/R/B/W/T.
 - V: PCN 54/R/B/W/T.
- ALL ARE CEMENT CONCRETE.



ELEVATIONS AND DIMENSIONS IN METRES

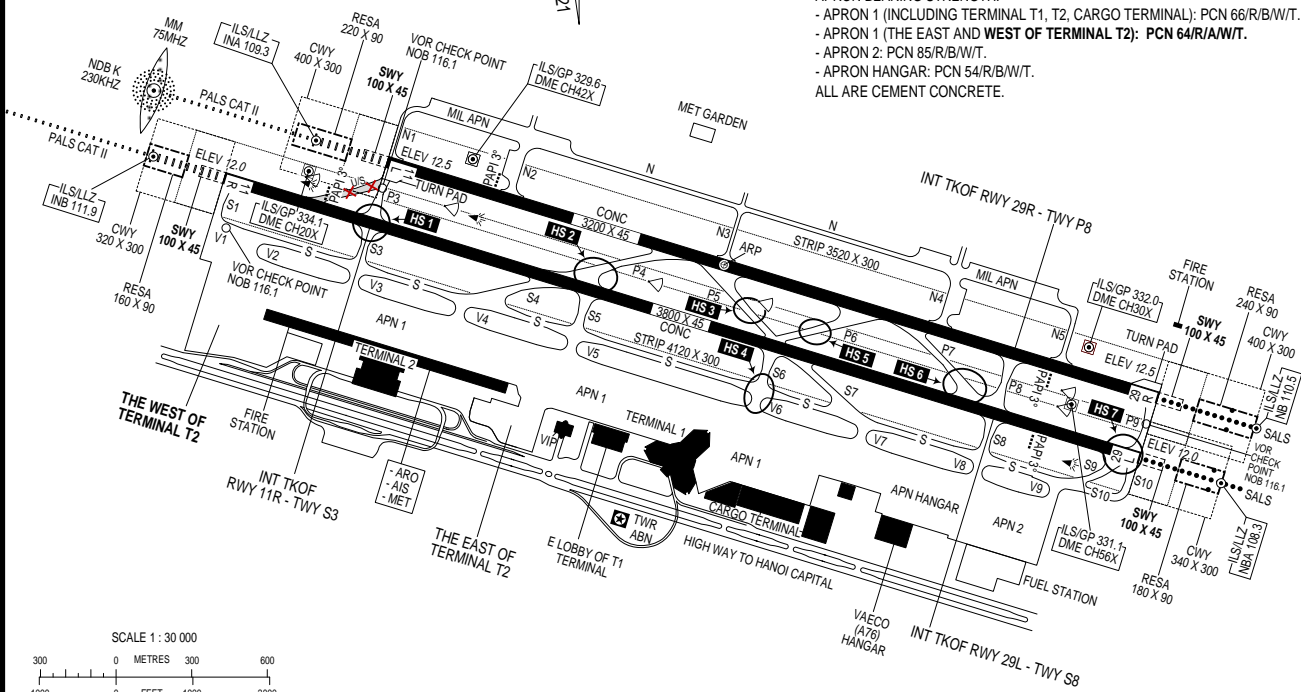




- APRON BEARING STRENGTH:
- APRON 1 (INCLUDING TERMINAL T1, T2, CARGO TERMINAL): PCN 66/R/B/W/T.
 - APRON 1 (THE EAST AND WEST OF TERMINAL T2): PCN 64/R/A/W/T.
 - APRON 2: PCN 85/R/B/W/T.
 - APRON HANGAR: PCN 54/R/B/W/T.
- ALL ARE CEMENT CONCRETE.



REFER TO AIP SUP AND RELATED NOTAMS FOR WIP AREAS.



LEGEND	
VOR CHECKPOINT AND FREQUENCY	○ NOB 116.1
HOT SPOT AND NAME	○ HS1
BUILDINGS	■
CLOSED	✗
TWY/RWY EDGE LIGHTS, RCL LIGHTS, TDZ LIGHTS	●
WIND DIRECTION INDICATOR (WDI)	↖
RUNWAY VISUAL RANGE (RVR)	▷

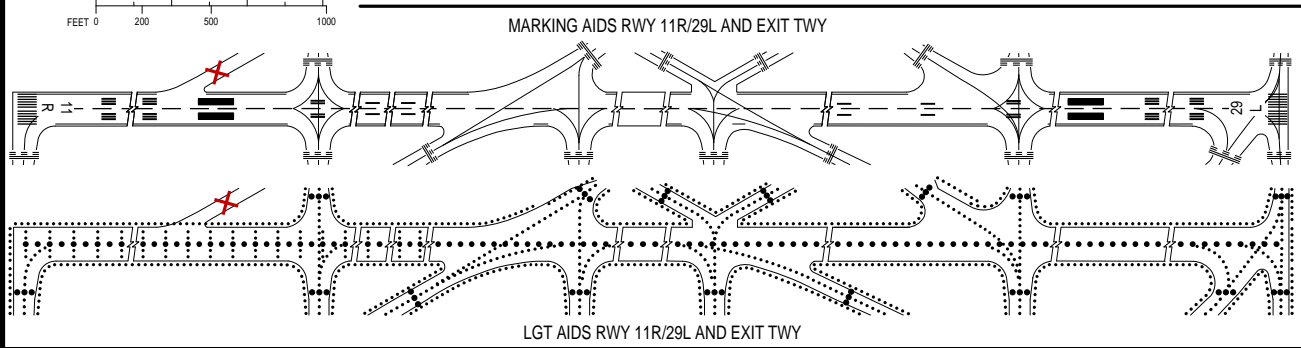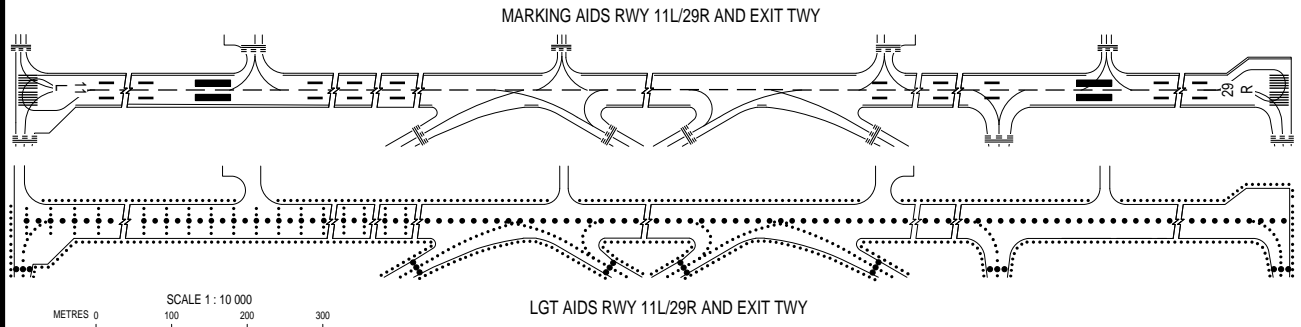

CHANGES: PCN OF TWYS AND APRN. SWY. ADDN OF WEST OF TERMINAL T2