


APRON	STANDS 1, 2	PCN 63/R/B/W/T CEMENT CONCRETE
	STANDS 3, 4	PCN 53/R/B/W/T CEMENT CONCRETE
	STANDS 5, 6	PCN 46/F/B/X/T BITUMINOUS CONCRETE
TAXIWAYS	W1	PCN 45/F/B/X/T BITUMINOUS CONCRETE
	W2	PCN 45/F/B/X/T BITUMINOUS CONCRETE



RWY	DIRECTION (TRUE)	THR WGS-84	BEARING STRENGTH
17	173°	18°44'54"N 105°40'09"E	PCN 45/F/B/X/T
35	353°	18°43'37"N 105°40'20"E	
35 DISPLACED	353°	18°43'46"N 105°40'19"E	

TAXIWAYS WIDTH:
W1, W2: 18M


ELEVATIONS AND DIMENSIONS IN METRES
BEARINGS ARE MAGNETIC

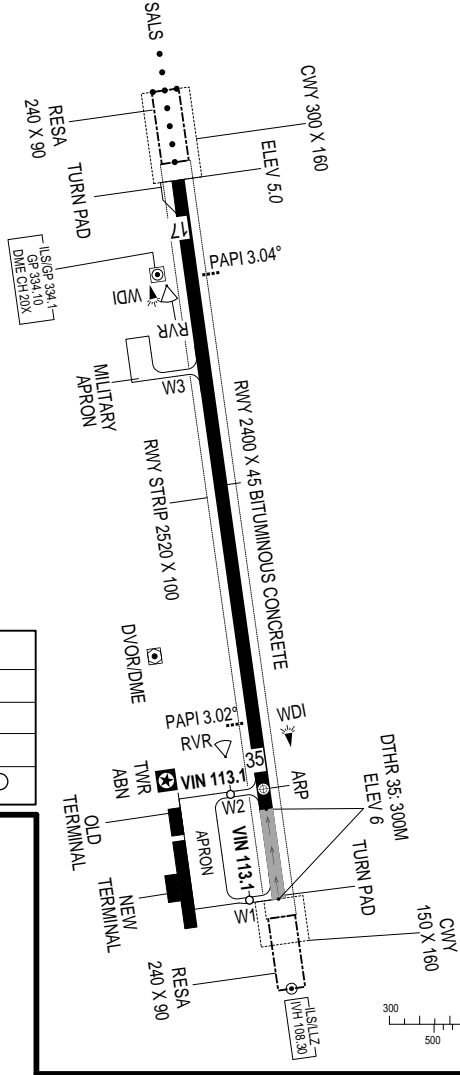


LEGEND	
BUILDINGS	■
TWY/RWY EDGE LIGHTS	•
RWY - HOLDING POSITION	▬▬▬
VOR CHECK POINT AND FREQUENCY	VIN 113.1 ○

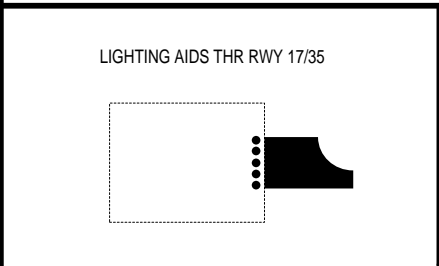

MARKING AIDS RWY 17/35 AND EXIT TWY

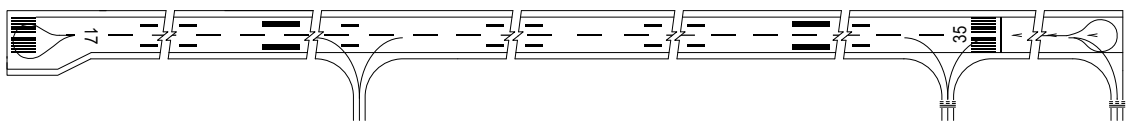

MARKING AIDS RWY 17/35 AND EXIT TWY

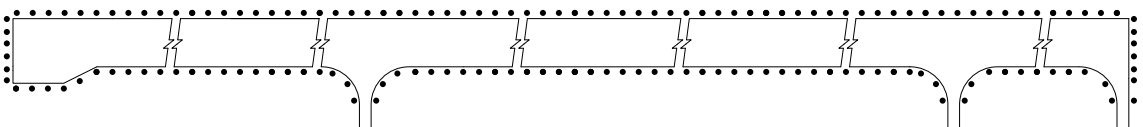

NOT TO SCALE

CHANGES: BEARING STRENGTH OF RWY AND TWYS W1, W2; ADDN OF VOR CHECK POINT; WITHDRAWAL OF HOT SPOT 1.